


#### Detail 4. Isolation Joint

Slabs to receive terrazzo flooring should accommodate Isolation Joints where the slab is separated from the load bearing columns or walls for this specific purpose.

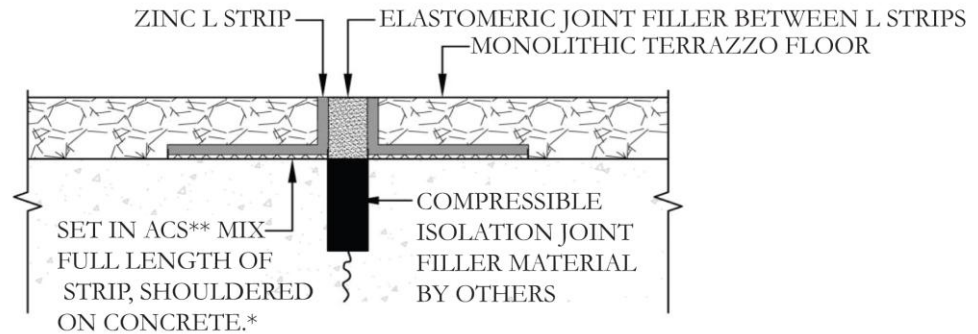

\*Care should be taken by concrete contractor to provide a straight joint, placed in coordination with design teams consideration of final grid pattern. Square edges encouraged, tooled edges discouraged.

\*\*\*ACS stands for Acrylic Cement Sand